

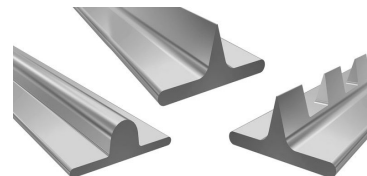
Technical data sheet

07.10.2024

Article-number: BRF00001 – BRF00011**Designation:**

RSP Processing rule

- RSP Perforating rule 4 tpi – 50 tpi (tpi = teeth per inch)
- RSP Cutting rule
- RSP Creasing Rule R1 (only for creasing) and R2 (for combined forms)

**Description:**

- Processing rules for creasing, diecutting, kisscutting and perforating
- Height-adjusted and especially developed for use with RSP

Product advantage:

- Especially developed for use with RSP
- Lower costs due to larger runs
- Greater efficiency due to more frequent use of the grid sheets
- Longer life for grid sheets due to optimum adhesive power
- Greater stability in handling
- Faultless further processing thanks to maximum accuracy and quality
- Can be used flexibly for all kinds of requirements and materials

Product structure:

	Description
Rule	Corrosion-resistant stainless steel
Lamination	Adhesive tape with protective liner
Length	6 m
Form of delivery:	Role

Storing conditions: 15 - 25°C, 50% rel. h.**Storage duration:** 12 months**Indoor conditions****for processing:** 18 °C bis 35 °C**HS Code:** 82089000**Country of origin:** Czech Republic**Waste disposal:** Residual waste; observe local disposal regulations.