



CITO LOCK

Safer transport and storage due to better protection of your stripping tools.


- Locking bolt made of 100 % break-proof material
- Prevents damage to your valuable stripping tools during transport
- Secure storage for tools
- Improved machine performance, less down time
- Convenient and safe handling
- Automatic safety lock
- Patented technology

Operation manual

The CITO LOCK principle works only in combination with the special CITO LOCK Nut. The CITO LOCK material and geometry are perfectly aligned, so the bolt optimally dovetails with the thread to create the perfect CITO LOCK locking function.

1.

Cut the CITO LOCK notch into the upper and lower Stripping Board. For correct positioning of the CITO LOCK the notches have to lie on top of each other!

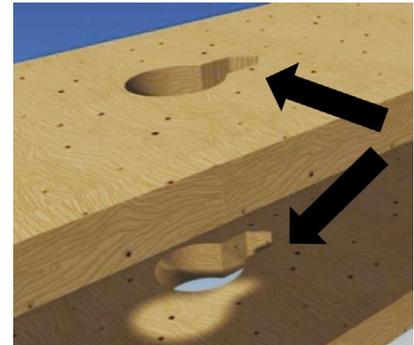



2.

Mount the correct CITO LOCK Nut into the upper Stripping Board.



3.

Install the CITO LOCK Bolt through the notch in the lower Stripping Board and screw the bolt clockwise.

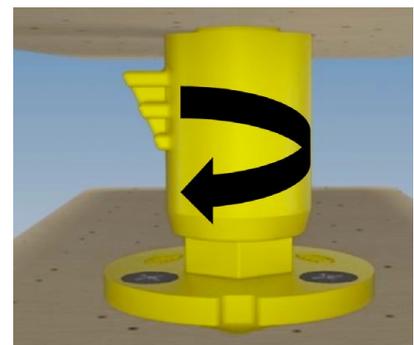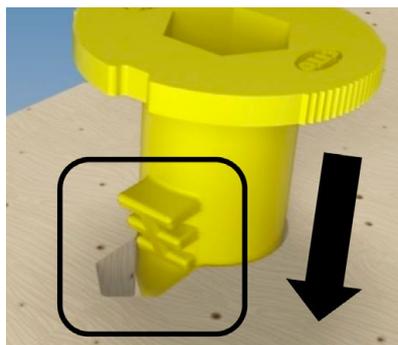

Technical data

Description	Colour	Length	Unit	Order no.
CITO LOCK Bolt	Yellow	43 mm	250 pcs.	BLC01020
CITO LOCK Nut	Yellow		250 pcs.	BLC01021
CITO LOCK Bolt	Black	50 mm	250 pcs.	BLC01022
CITO LOCK Nut	Black		250 pcs.	BLC01023